The New MYSON T6 IVC Radiators

T6 IVC Radiator brings new symmetry and flexibility to heating

The T6 IVC center-connection Radiator features innovative design, high quality workmanship, and high heat output.

This dual panel, double convector radiator offers the advantage of a standard 2" central connection and the standard 4 corner connection options. Pre-planning and installation are greatly reduced, saving time and money. The new "T" design allows installers the flexibility to connect to the most convenient location for installation.

- Heights of 12", 20" and 24"
- Lengths from 15-3/4" to 78-3/4"
- Replaces baseboard up to 29 ft.
- Internal Valve Control (IVC) keeps pipe work hidden inside
- Up to 16,036 BTU/hr output
- 6 options for installation: The 2" centered connection and the 4 corner connections
- Fitted with Myson TRV (thermostat valve control) for accurate and adjustable room temperature control
- 18 sizes
- 5 year warranty

The Myson T6 IVC Radiator is a ready-to-install radiator and includes a wall-mounting bracket set, a thermostatic head and insert, drain-off plug, air bleed vent and compression fittings for 1/2" copper tubing.

For more information, contact MYSON at www.mysoninc.com or call 1-800-698-9690.

The 2" center connection greatly reduces the amount of pre-planning and installation work and makes for a cleaner look.

MYSON

The First Name In Radiators

Specifications MYSON T6 IVC Radiators

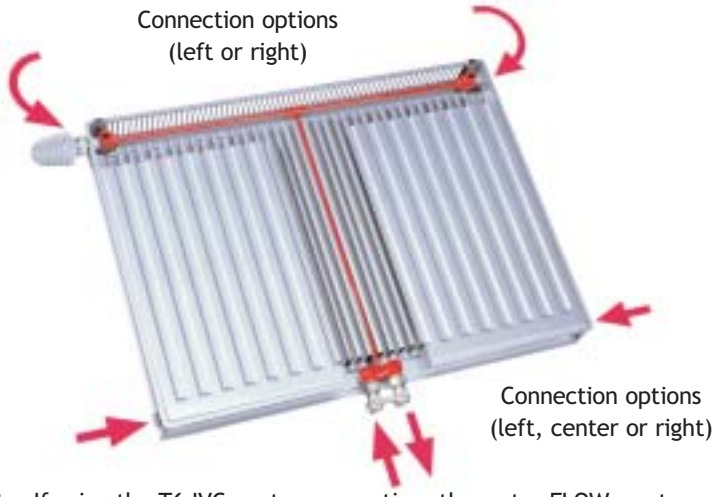

Note: If using the T6 IVC center connection, the water FLOW must always be connected on the LEFT and the RETURN on the RIGHT regardless of which side the thermostat is positioned.

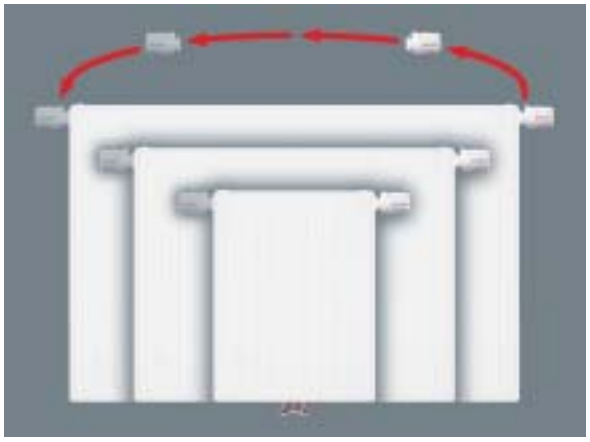

The unique design of the Myson T6 IVC Radiator makes it possible for the installer to position the TRV Valve either on the left or the right.

The T6 IVC is a double panel, double convector radiator

3 heights: 12", 20" and 24"

Radiator width: 4-1/8"

T6 IVC Radiator Specifications

Nominal Height	Order Code	Actual Height	Actual Length	Output (BTU/hr)	Equivalent Baseboard Length*	Weight (lbs)	Water Content (gals)
12"	TK2-3-06	11 13/16"	23 5/8"	2,890	5'	31.7	0.56
	TK2-3-10		39 3/8"	4,814	9'	51.2	0.90
	TK2-3-14		55 1/8"	6,742	12'	70.7	1.27
	TK2-3-20		78 3/4"	9,632	18'	100.0	1.64
20"	TK2-5-04	19 11/16"	15 3/4"	2,811	5'	36.1	0.57
	TK2-5-06		23 5/8"	4,217	8'	53.5	0.85
	TK2-5-92		36 1/4"	6,466	12'	81.3	1.30
	TK2-5-12		47 1/4"	8,434	15'	105.5	1.65
	TK2-5-16		63"	11,246	20'	140.2	2.21
	TK2-5-18		70 7/8"	12,652	23'	157.6	2.49
	TK2-5-20		78 3/4"	14,057	26'	174.9	2.77
24"	TK2-6-04	23 5/8"	15 3/4"	3,207	6'	43.3	0.68
	TK2-6-06		23 5/8"	4,811	9'	64.5	1.01
	TK2-6-92		36 1/4"	7,377	13'	98.3	1.55
	TK2-6-12		47 1/4"	9,622	17'	128.0	1.98
	TK2-6-16		63"	12,829	23'	170.6	2.65
	TK2-6-18		70 7/8"	14,433	26'	191.5	2.99
	TK2-6-20		78 3/4"	16,036	29'	212.6	3.33

*Baseboard @ 550 BTU/ft./hr.

MYSON
The First Name In Radiators

MYSON, Inc.
948 Hercules Drive
Colchester, VT 05446
1-800-698-6990
Fax 802-654-7022

www.MysonInc.com

In accordance with our policy of continual product improvement, we reserve the right to amend specifications without prior notification.

260029 / 7.5M